



DS-8000HSI-S Series Net DVR
Technical Manual

Notices

The information in this documentation is subject to change without notice and does not represent any commitment on behalf of HIKVISION. HIKVISION disclaims any liability whatsoever for incorrect data that may appear in this documentation. The product(s) described in this documentation are furnished subject to a license and may only be used in accordance with the terms and conditions of such license.

Copyright © 2006-2010 by HIKVISION. All rights reserved.

This documentation is issued in strict confidence and is to be used only for the purposes for which it is supplied. It may not be reproduced in whole or in part, in any form, or by any means or be used for any other purpose without prior written consent of HIKVISION and then only on the condition that this notice is included in any such reproduction. No information as to the contents or subject matter of this documentation, or any part thereof, or arising directly or indirectly therefrom, shall be given orally or in writing or shall be communicated in any manner whatsoever to any third party being an individual, firm, or company or any employee thereof without the prior written consent of HIKVISION. Use of this product is subject to acceptance of the HIKVISION agreement required to use this product. HIKVISION reserves the right to make changes to its products as circumstances may warrant, without notice.

This documentation is provided “as-is,” without warranty of any kind.

Please send any comments regarding the documentation to:
overseabusiness@hikvision.com

Find out more about HIKVISION at www.hikvision.com

Contents

- 1. Overview**
- 2. Model Description**
- 3. Features**
- 4. Specifications**


1. Overview

DS-8000HSI-S series Network Digital video Recorder is an excellent digital surveillance product adopts embedded MCU (Microprocessor Control Unit) and an embedded Real-Time Operating System (RTOS), along with the most advanced technology in the Information technology Industry such as video encoding/decoding, hard disk recording and TCP/IP transmission. The firmware is burned into the flash, making it more stable and reliable than software programs running from a standard disk drive.

DS-8000HSI-S series combines the advantages of Digital Video Recorder (DVR) and Digital Video Server (DVS). It is widely applied as a stand-alone unit or a part of a powerful surveillance system.



DS-8000HSI-S Front Panel

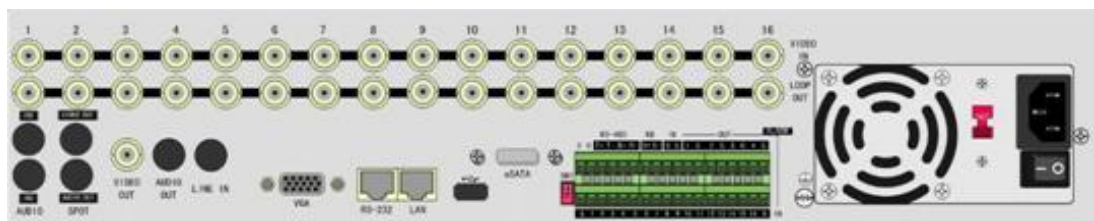

DS-8016HSI-S Rear Panel

2. Model Description

DS-8004HSI-S: 4-ch video input. Each camera can max support 4CIF preview resolution real time. 4 SATA interfaces. 4-ch video loop output.

DS-8008HSI-S: 8-ch video input. Each camera can max support 4CIF preview resolution real time. 8 SATA interfaces. 8-ch video loop output.

DS-8016HSI-S: 16-ch video input. Each camera can max support 4CIF preview resolution real time. 8 SATA interfaces. 16-ch video loop output.

Note: The default DVRs are without HDD or CD-R/W.

3. Features

3.1 Compression:

- Supports up to 16 video channels (NTSC/PAL). Each channel is independent with H.264 hardware compression in real time (NTSC 30FPS, PAL 25FPS).
- Supports both variable bit rate and constant bit rate
- Supports 4CIF, DCIF, 2CIF, CIF and QCIF resolution.
- Supports multi-area motion detection
- Supports OSD and changeable OSD position
- Supports LOGO and changeable LOGO position

3.2 Local functions:

3.2.1 Recording:

- Supports multiple recording types, including real-time, manual recording, motion detection, external alarm, motion & alarm and motion | alarm, etc.
- Supports 8 HDDs. Each HDD can support 2000GB maximum.
- Supports FAT32 file system
- Supports NAS Recording.
- Supports Event Recording Para. Setup.
- Supports HDD S.M.A.R.T technology
- Supports continuous (overwrite) and linear (stop when full) record modes
- Supports backup recorded files and video clips with USB memory stick (thumb drive), USB HDD, USB CD-R/W, USB DVD-R/W or SATA HDD.

3.2.2 Preview and playback:

- Supports BNC analog monitor and VGA output for main output
- Supports multiple live view modes
- Supports video loop output.
- Supports Privacy Mask (blank portions of camera views)
- Supports camera block alert.
- Supports video signal loss alert.
- Support play forward, backward, pause, frame-by-frame, etc
- Supports play back by files or by time/date
- Displays local record status

3.2.3 PTZ:

- Supports multiple PTZ protocols
- Supports preset, sequence and pattern

3.2.4 Alarms:

- Supports exception alarm, motion detection alarm, external alarm, etc

3.3 Miscellaneous:

- Supports IR Remote control
- Supports RS-485 keyboard
- Support multi-level user management
- Supports Mouse Operation Menu.
- Supports multiple upgrade modes, including FTP, USB and CD.
- Supports writing player when burning CD.

3.4 Network:

- Supports Advanced Network Function: NTP, DDNS and E-mail.
- Supports TCP, UDP, RTP, Multicast for network viewing
- Support PPPoE for broad band dialup
- Supports PSTN for standard dialup
- Supports remote parameters setup
- Alarm information can be sent to remote center
- Network control PTZ
- Network download and playback recorded files from the DVR
- RS-232 supports transparent channel function so that the remote PC can control serial devices through DVR.
- Supports advanced IE plug-in to preview and configure DVR via browser.
- Supports SADP protocol that enables modification of IP address, mask and port via SADP Client.
- Supports activity log.

3.5 Development support:

- Provide network SDK (Software Development Kit)
- Provide client demo source code

4. Specifications

Model name	DS-8004HSI-S	DS-8008HSI-S	DS-8016HSI-S
Video standard	H.264		
Preview resolution	4CIF real-time (PAL: 704*576, NTSC: 704*480)		
Playback resolution (PAL/NTSC)	QCIF/CIF real-time 2CIF 15/16 FPS per channel DCIF 12/13 FPS per channel 4CIF 8/9 FPS per channel	QCIF/CIF real-time 2CIF 8/9 FPS per channel	
Video input	4	8	16
	BNC (1.0Vp-p, 75Ω)		
Video loop output	4	8	16
Composite video output	1 channel, BNC (1.0Vp-p, 75Ω)		
Aux video output	-		
Audio input	-		
Composite audio output	-		
Aux audio output	-		
Frame rate	PAL: 1/16~25FPS, NTSC: 1/16~30FPS		
Stream type	Video		
Max bit rate	32Kbps~2Mbps, self-define		
Dual stream	-		
Voice talk	-		
Network port	1 RJ45 10M/100M UTP port		
RS-232	1 RJ45 RS-232 port		
PTZ control	1 RS-485 port (T+, T-, R+, R-)		
Keyboard interface	2 RJ45 ports	1 port (D+, D-)	1 port (D+, D-)
SATA interface	4	8	8
E-SATA (optional)	1 st internal SATA interface can be extended to be E-SATA		
USB interface	1 USB 1.1 port		
VGA interface	1 VGA interface, support resolution: 800x600/60Hz, 1024x768/60Hz, 1280x1024/60Hz		
External alarm in	4	16	16
Relay output	2	4	4
Power supply	100~240VAC, 6.3A, 50~60Hz		

Power consumption	20 -- 42W (without HDD and CD-R/W)
Working temperature	-10°C to +55°C
Working humidity	10% to 90%
Size	19" Standard (450mm*450mm*95mm)
Weight	≤8Kg (without HDD and CD-R/W)

PAL: 176×144(QCIF), 352×288(CIF), 704×288(2CIF), 528×384(DCIF), 704×576(4CIF);
NTSC: 176×120(QCIF), 352×240(CIF), 704×240(2CIF), 528×320(DCIF), 704×480(4CIF).